HERONGRIPA

Vinyl matting resistant to animal fat and oils

Developed primarily for the food processing and preparation industries, Herongripa is a specialised vinyl matting solution, which is hygienic and animal fat resistant.

The wide spaced open grid format allows waste and spillages to fall through, keeping the standing area free of slippery and potentially hazardous matter. The one piece hardwearing vinyl roll format allows for ease of rolling up during cleaning routines.






BENEFITS

FEATURES

Certified slip resistance DIN 51130: R11 ASTM 1677: 0.8/0.7	Diamond cut pattern
Excellent drainage DIN 51130: V10	Two layer construction
Tough vinyl for food processing areas	Animal fat resistant DINP plasticised PVC
Chemical, oil and acid resistant	Non-porous PVC (impermeable to fluids)
One piece covering	Supplied in 10m rolls
Continuous hygiene	Anti-fungal and anti-bacterial additives
Efficiently removes spillages	Large open grid format

STANDARD COLOUR




TERRACOTTA

STANDARD SIZES

PRODUCT	FACTORY	HEIGHT	STANDARD ROLL OPTIONS*				
Herongripa	UK	15mm (5/8")	5 x 0.6m (16'6" x 2')	5 x 0.91m (16'6" x 3')	5 x 1.22m (16'6" x 4')		
Herongripa	UK/USA	15mm (5/8")	10 x 0.6m (33' x 2')	10 x 0.91m (33' x 3')	10 x 1.22m (33' x 4')		

 $^{{}^{*}\}text{Contact}$ us for bespoke dimensions.



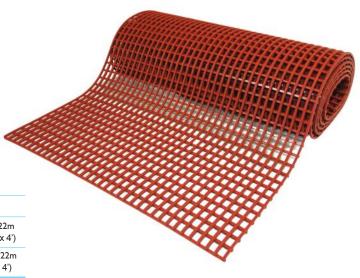



Web: www.plastexmatting.com

PRODUCT DATA SHEET: HERONGRIPA

SIZES & WEIGHTS

All dimensions are nominal H	leight (mm)	Lengths (m)	W	idths (c	m)	Weight (kg/m²)
Tolerances (mm)	+/- 0.5	0+0.3		+/-		
Herongripa	15	5 & 10	60	91	122	4.3





GENERAL

APPEARANCES Open grid "duckboard" design with textured surface.

COLOURS Available in one homogenous standard colour; Terracotta.

DURABILITY One piece welded construction for maintenance free life.

WORKABILITY Flexible construction is easy to cut and shape on site.

Supplied in rolls with top ribs facing outwards. Requires inverting once rolled out prior to use.

USES For food processing areas.

TECHNICAL DATA

ACOUSTIC Excellent sound absorption properties.

CHEMICAL Resistant to most acids, alkalines and oils. For specific chemical resistances, see

www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf

COMPOSITION Flexible animal fat resistant DINP plasticised Polyvinyl Chloride (PVC) with Steritouch additives.

ENVIRONMENT Plastex does not use any substances currently included in the SVHC (Substances of Very High Concern) list under

R.E.A.C.H.* in any matting products. All products are 100% recyclable.

* Registration, Evaluation, Authorisation and Restriction of CHemical substances

HYGIENE Non-porous 100% Virgin PVC - Inhibits the growth of bacteria.

 $Anti-bacterial\ SteriTouch\ additive;\ Test\ JIS\ Z\ 2801:2000\ -\ Determination\ of\ the\ antibacterial\ effect\ against:$

Staphylococcus aureus
E. Coli
Result - Antimicrobial pass of >99%
Result - Antimicrobial pass of >99.99%
Anti-fungal SteriTouch additive; Test method ASTM G21-09 - Determining resistance to fungi.

Result - Nil Growth after 4 weeks

REVERSION Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to

www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf

SLIP RESISTANCE ASTM F 1677 - Dry/Wet: 0.8/0.7

DIN 51130: R11, V10

THERMAL Functional -23^oC +60^oC (slight size variation may occur at temperature extremes).

UV LIGHT Resistance to PVC degradation.

WARRANTY 3 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf



PRODUCT DATA SHEET: HERONGRIPA

ANCILLARIES



14mm x 60mm x 10.1m (9/16" x 2 1/2" x 33")

Supplied in rolls of 10.1m (33') length with cold welding paste.

60mm PVC edging strip

Colours: Black, Dark Grey, Dark Brown, Holly Green, Oxford Blue, Yellow

JWWwwww.

100mm PVC edging strip

Supplied in rolls of 10.1m (33') length

Colours: Black, Dark Grey, Yellow

14mm x 100mm x 10.1m with cold welding paste. (9/16" x 3 3/4" x 33')

15mm x 45mm x 2m (5/8" x | 13/16" x 6'6") 45mm Aluminium edging strip

Supplied in sections of 2m (6'6") length with fixing screws and plugs.

Colours: Anodised Aluminium,

Powder Coated Yellow



Small floor hook

For securing sections of matting to floor. Supplied in packs of 10 with screws and



Connector clips - Dual purpose

For joining sections of matting together side to side or end to end. Supplied in packs of 10.

Web: www.plastexmatting.com

